

DESKTOP RADIO SCANNER

Quick Start Guide

WS1065

START HERE!

Package Contents:



Scanner

Antenna

AC Adapter

Mounting Bracket

PC/IF Cable


Also Included:

- Screw (2)
- Rubber washer (2)
- Lock washer (2)
- Rubber feet (5)
- Knob (2)
- DC cable with fuse
- User's Guide

See the Owner's Guide for complete instructions



1 INSTALL BRACKET

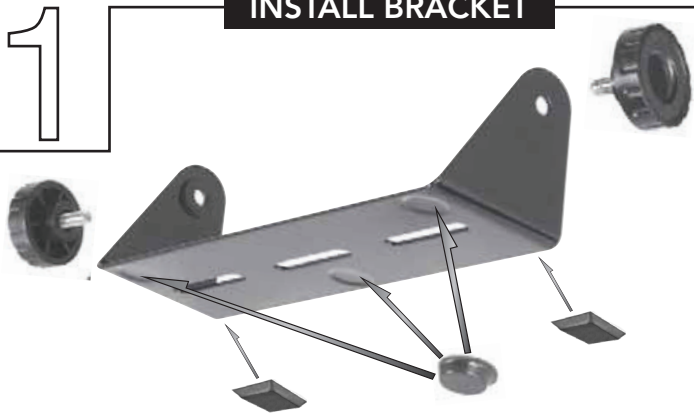


For desktop use:

1. Attach the protective rubber feet to the mounting bracket as shown.
2. Attach the two adhesive rubber washers to the inside of the bracket as shown.
3. Slide the scanner into the bracket, aligning the scanner's side holes with the holes in the bracket, and then screw the mounting knobs into the scanner.

Refer to your User's Guide for bracket mounting and vehicle installation.

2 INSTALL ANTENNA

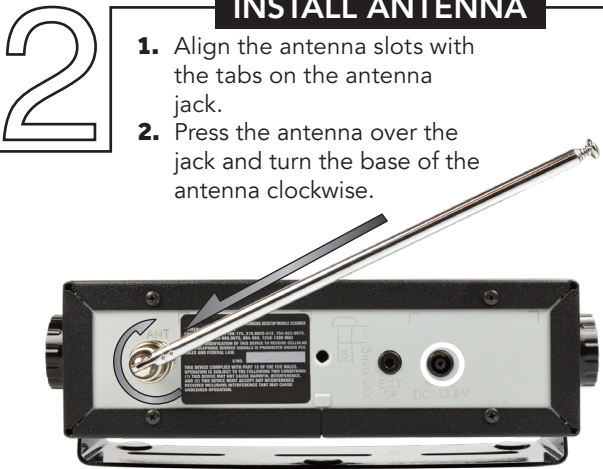

1. Align the antenna slots with the tabs on the antenna jack.
2. Press the antenna over the jack and turn the base of the antenna clockwise.

AC Power

1. Connect the supplied adapter to the scanner's DC 13.8V jack.
2. Plug the adapter into a standard household power socket.
3. To disconnect, unplug the adapter from the power source first.

3 PROGRAM FREQUENCIES



Preset squelch between 10 and 12 o'clock position

We recommend programming your local radio systems using a Windows PC. You will need a membership in www.radioreference.com and a free 30-day download from either PSREdit.com or butel.nl. This method does not require you to retype any frequencies or names and you do not need to know anything about trunking systems, you only need to know what you want to monitor from the radioreference lists.

If you wish to program by hand, look up your local frequencies at www.radioreference.com/db/browse. Select your state/country and county/region to locate a list of frequencies in your area.